## DLOS QUICK STICK SERIES





## **FEATURES & BENEFITS**

- Weatherproof interior or exterior mount
- 34 customer selectable warning flash patterns plus 5 phase options
- 12 traffic director patterns, TD models come with SB44-5 control box (6 and 8 head versions only)
- DLQS-4 comes with a 2' three-wire cable (power, ground, pattern select)
- DLQS3-6-\*\*-3 & DLQS3-8-\*\*-3 comes with 3' six wire cable
- DLQS-6 (8) & DLQS3-6 (8) comes with a 25' six wire cable, (power, ground, program wire, left enable, right enable, warn enable, center-out = L + R)
- Bottom and rear T-slots allow for easy mounting via industry standard #10 carriage bolt
- Front load assembly design allows quick and easy swap of heads
- Built-in Traffic Director function available (six head and eight head models only)
- Sealed DLITS heads for maximum reliability
- Shipped standard with L-brackets
- Dual Warn option (8 head module only): Programmable to allow the end heads to flash a warning pattern, while the center 6 heads flash a traffic director pattern

- SB44-5 can be purchased seperately
- Ideal for front push bumpers, rear SUV or pickup truck windows, headache rack, and running board lights
- Dimensions: (DLQS3-6) 19<sup>1</sup>/4" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS3-8) 25<sup>1</sup>/<sub>2</sub>" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS-4) 20<sup>1</sup>/<sub>2</sub>" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS-6) 30<sup>39</sup>/<sub>64</sub>" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS-8) 40<sup>39</sup>/<sub>64</sub>" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS-47) 47" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS-56) 56" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H (DLQS-76) 76" L x 1<sup>15</sup>/<sub>32</sub>" W x 1<sup>13</sup>/<sub>16</sub>" H
- Voltage: 10-16V DC
- Amp draw: 2 amps average (4 head) and (DLQS3 versions) 3 amps average (6 head) 4 amps average (8 head)
- Color combinations:
- Approvals: SAE Class I (A,B,C,R DLITS only)

**Warning:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov




FOR MORE INFORMATION VISIT OUR WEBSITE. STARSAFETYTECHNOLOGIES.COM Star Safety Technologies, LLC 455 Rochester St., Avon, NY 14414 Phone: 585-226-9500 | Fax: 888-478-2797



SF190 Rev-H 05-11-2023



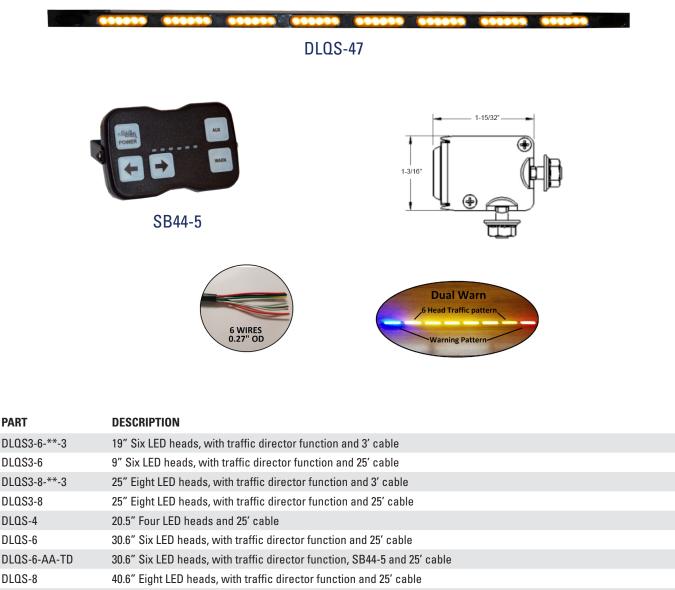

| DLQS-8-AA-TD | 40.6" Eight LED heads, with traffic director function, SB44-5 and 25' cable |
|--------------|-----------------------------------------------------------------------------|
|--------------|-----------------------------------------------------------------------------|

47" Eight LED heads, with traffic director function and 25' cable

DLQS-56 56" Six LED heads, with traffic director function and 25' cable

DLQS-76 76" Eight LED heads, with traffic director function and 25' cable

Marning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



PART

DLQS-47

FOR MORE INFORMATION VISIT OUR WEBSITE. STARSAFETYTECHNOLOGIES.COM **Star Safety Technologies, LLC** 455 Rochester St., Avon, NY 14414 Phone: 585-226-9500 | Fax: 888-478-2797

