

DASH MOUNT LIGHTING ACCESSORIES

Models 274-874, 274-875, 274-878, and 274-878M

IMPORTANT: Please read all of the following instructions before installing your new warning light.


WARNING!!!! Care should be taken when positioning any warning light on the dash, instrument panel or visor of the vehicle, so that the light and/or cord does not interfere with the proper operation of the airbag! Failure to heed this warning may result in serious or fatal injury.

Model 274-874 **Dash Bracket**



1. Remove all of the parts from the plastic bag and install the suction cups into the holes of the dash bracket with the suction cups facing away from the sliding plate. Attach them using the enclosed brass knurled knobs.
2. Clean the windshield area where the suction cups will be attached to remove any residue that may be present on the window.
3. Position the bracket on the dash and, if necessary, bend the metal tabs such that the suction cups are aligned with the windshield. Press each suction cup firmly against the windshield.
4. Remove the paper backing from the enclosed foam pad and affix the pad to the bottom of the bracket, between the bracket and the dash.
5. Mount your warning light on top of the sliding plate and adjust it accordingly.

Model 274-875 **Dual-Mirror Reflector**

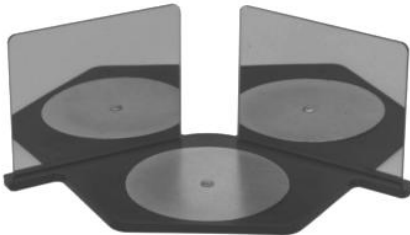

1. Remove all of the parts from the plastic bag and position the black base on a firm flat surface with the metal plate facing upward.
2. With the rounded edges facing upward, insert each of the mirrors into the slots on the base and press them firmly into place until the bottom is flush with the base.
3. After checking that both the base and the mounting surface are free of dust or dirt, remove the plastic backing and affix one side of the Velcro strips enclosed to the bottom of the base, and the other half to your mounting surface.
4. Attach the base to the mounting surface using the Velcro and mount your warning light on top of the base, adjusting it as necessary.

Model 274-878 or 274-878-80 **Quad-Mirror Reflector**



1. After checking that both the base and the mounting surface are free of dust or dirt, remove the plastic backing and affix one side of the Velcro strips enclosed to the bottom of the base, and the other half to your mounting surface.
2. Attach the base to the mounting surface using the Velcro and mount your warning light on top of the base, adjusting it as necessary.
3. The **274-878M** comes equipped with a magnet in place of the Velcro, to affix the unit to a metal surface.

Once your light is secured, route your cord such that it does not interfere with the vision of the driver or the operation of any controls, including, but not limited to, the steering wheel, gear shifter, and/or airbag.

WARNING!!!! Care should be taken when positioning any warning light on the dash, instrument panel or visor of the vehicle, so that the light and/or cord does not interfere with the proper operation of the airbag! Failure to heed this warning may result in serious or fatal injury.



It is the sole responsibility of the owner to ensure the warning light is secure. Check your light every time you enter the vehicle to ensure that it is mounted securely. Star Headlight and Lantern Co. assumes no responsibility for the secure mounting of your light.

The use and installation of this product are the responsibility of the end user. It is the user's responsibility to know and obey all laws regarding the use of this product. Check all local, state, and federal laws to ensure your compliance with these laws.

ONE YEAR LIMITED WARRANTY

Star Safety Technologies, Inc. warrants each new product against factory defects in material and workmanship for one year after the date of purchase. The owner will be responsible for returning to the Service Center any defective item(s) with the transportation costs prepaid. Star Safety Technologies, Inc. will, without charge, repair or replace at its option, products, or part(s), which its inspection determines to be defective. Repaired or replacement item(s) will be returned to the purchaser with transportation costs prepaid from the service point. A copy of the purchaser's receipt must be returned with the defective item(s) in order to qualify for the warranty coverage. Exclusions from this warranty include, but are not limited to, bulbs, strobe tubes, domes, and/or the finish. This warranty shall not apply to any light, which has been altered, such that in Star Safety Technologies, Inc.'s judgment, the performance or reliability has been affected, or if any damage has resulted from abnormal use or service.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend this warranty period. The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages, including costs of any labor, are not covered. Star Safety Technologies, Inc. reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights. You might also have additional rights that may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts. Some states do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitation(s) or exclusion(s) may not apply to you.

If you have any questions concerning this or any other product, please contact our Customer Service Department at (585) 226-9787.

If a product must be returned for any reason, please contact our Customer Service Department to obtain a Returned Materials Authorization number (RMA #) before you ship the product back. Please write the RMA # clearly on the package near the mailing label.



455 Rochester Street Avon, NY 14414
585-226-9500 (F) 888-478-2797