
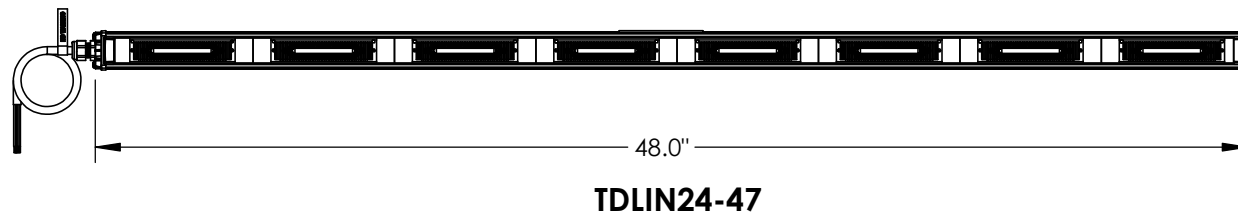
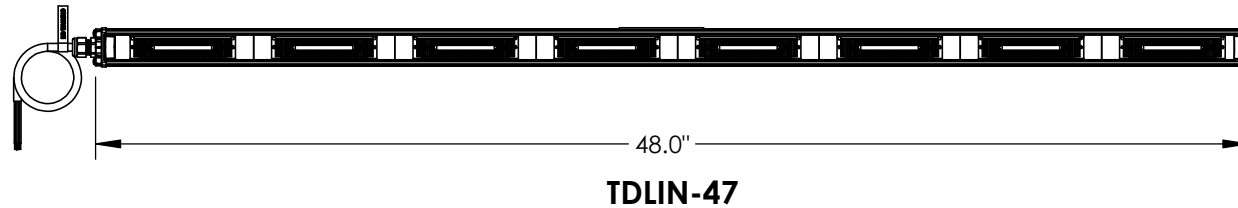


REV.	ECR	DESCRIPTION	DATE
-	13500	INITIAL DRAWING REQUEST	04/07/16

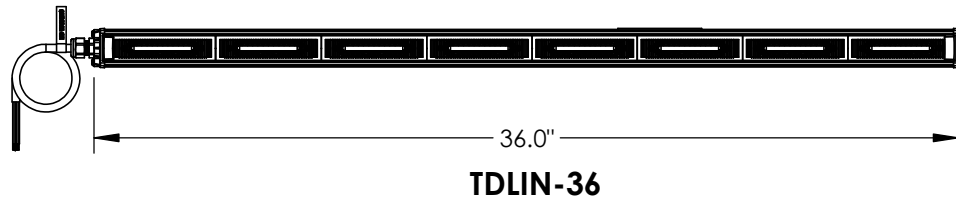


12V MODELS AVAILABLE	
MODEL	DESCRIPTION
TDLIN-36-15	36" LINEUM TRAFFIC DIRECTOR - w/15' CABLE
TDLIN-36-30	36" LINEUM TRAFFIC DIRECTOR - w/30' CABLE
TDLIN-47-15	47" LINEUM TRAFFIC DIRECTOR - w/15' CABLE
TDLIN-47-30	47" LINEUM TRAFFIC DIRECTOR - w/30' CABLE
TDLIN-47-45	47" LINEUM TRAFFIC DIRECTOR - w/45' CABLE
TDLIN-47-60	47" LINEUM TRAFFIC DIRECTOR - w/60' CABLE

24V MODELS AVAILABLE	
MODEL	DESCRIPTION
TDLIN24-47-30	47" LINEUM TRAFFIC DIRECTOR - w/30' CABLE


- 12V PRODUCT INFORMATION --**
- ELECTRICAL
- VOLTAGE: 10-16VDC
 - AMP DRAW: 2.1A (MAX), 1.1A (AVE)
- PHOTOMETRIC APPROVALS: SAE J595 CLASS 1 (AMBER)
- MECHANICAL:
- ALUMINUM EXTRUSION
 - POLYCARBONATE LENS
 - INSTALLER MUST PROVIDE BRACKET TO VEHICLE FASTENERS

- 24V PRODUCT INFORMATION --**
- ELECTRICAL
- VOLTAGE: 20-30VDC
 - AMP DRAW: 1.0A (MAX), 0.5A (AVE)
- MECHANICAL:
- ALUMINUM EXTRUSION
 - POLYCARBONATE LENS
 - INSTALLER MUST PROVIDE BRACKET TO VEHICLE FASTENERS


STANDARD BRACKET
INCLUDED WITH ALL MODELS
(274-LLBK)



TRAFFIC DIRECTOR CONTROL BOX
INCLUDED
(12V = TD77-2)
(24V = TD77-2-24)



EXTRUSION DIMENSIONS



MOUNTING HARDWARE
10-32 CARRIAGE BOLT S/S



UNLESS OTHERWISE SPECIFIED	DRAWN BY:	MB
	DRAWING APPROVED BY ECR	
DIMENSIONS ARE IN INCHES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.	
TOLERANCES:		
ANGULAR: ± 2 DEG.		
.X ± .100 .XX ± .020 .XXX ± .005 .XXXX ± .001		
RoHS COMPLIANT:	Yes	
MATERIAL:	NONE	
FINISH:	NONE	

STAR HEADLIGHT & LANTERN CO., INC.

455 Rochester St. Avon NY 14414
Ph:(585) 226-9500 Fax: (585) 226-2029

MODEL: TDLIN-36, -47 & TDLIN24-47

TITLE:
TDLIN MODEL DRAWING

DWG. NO.	TDLIN	REV	-
SCALE: 1:12	DO NOT SCALE FROM DRAWING	SHEET 1 OF 1	