


REV.	ECR	DESCRIPTION	DATE	
-	13879	INITIAL DRAWING REQUEST	09/27/2016	





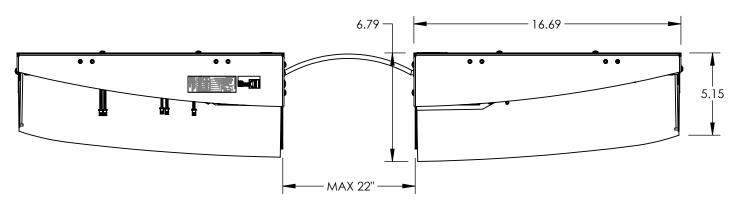

PRODUCT SPECIFICATIONS:

- VOLTAGE: 10-16 vdc ALL MODELS
- AMP DRAW: 10.5A max. 5.2A avg.
- OPERATING TEMPERATURE RANGE: -30C TO +50C
- CONNECTIONS: 8-WIRE, 14FT CABLE

MECHANICAL:

- ALUMINUM HOUSING
- POLYCARBONATE LENS

MOUNTING:

- 274-ULB21-XX (XX=VEHICLE SPECIFIC MOUNTING KITS)

APPROVALS:

- MEETS LIGHT OUTPUT REQUIREMENT OF TITLE 13, CLASS 1 WHEN PROPERLY CONFIGURED.

CABLE WIRE FUNCTIONS									
COLOR	FUNCTION	WIRE GAGE							
WHITE W/BROWN	PURSUIT (FLASHING WHITE LIGHTS) OR TD WARNING	22							
ORANGE W/GREEN	LEVEL 1 FLASHING WARNING LIGHTS	22							
ORANGE W/RED	LEVEL 2 FLASHING WARNING LIGHTS	22							
YELLOW	CALIFRONIA TITLE 13 LIGHTS (STEADY RED) OR TD RIGHT	22							
GREEN W/RED	PATTERN SELECT OR DIM	22							
RED	IGNITION SWITCH +12VDC	12							
BLACK	NEUTRAL (GROUND)	12							
BARE	DRAIN/SHIELD	22							

UNLESS OTHERWISE SPECIFIED	DRAWN BY:	EP	STAR HEADLIGHT & LANTERN CO., INC.			
DIMENSIONS ARE IN INCHES	DRAWING APPROVED BY ECR		455 Rochester St. Avon NY 14414			
TOLERANCES:	THE INFORMATIC	N CONTAINED IN THIS	Ph:(585) 226-9500 Fax: (585) 226-2029			
ANGULAR: ± 2 DEG.	DRAWING IS THE SOLE PROPERTY OF		F11.(303) 220-7300 Fax. (303) 220-2027			
.X ± .100 .XX ± .020 .XXX ± .005	STAR HEADLIGHT & LANTERN CO., INC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION	MODEL: ULB28				
.XXXX ± .001	OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.		DUAL COLOR SPLIT PHANTOM			
ROHS COMPLIANT: YES						
MATERIAL: N/A			DWG. NO. ULB28 REV 001			REV -
FINISH:						
N/A			SCALE: 1:12	DO NOT SCALE FROM DRAWING	SHEET	1 OF 1