

SPECIFICATION:

VOLTAGE RANGE: 9-32VDC

CURRENT DRAW: 1.0 A AVERAGE, 2.0 A PEAK @ 12.8 VDC

OPERATING TEMPERATURE RANGE: -40° TO 55°C

CONNECTIONS:

18 GAGE RED WIRE (+ POWER)

18 GAGE BLACK WIRE (- GROUND)

22 GAGE GREEN WIRE (PATTERN SELECT) *TOUCH AND RELEASE TO GROUND*

MOUNT:

5/16-18 X 3/4" CARRIAGE BOLT S/S

5/16 FLAT WASHER S/S

5/16 LOCK WASHER S/S

5/16 HEX NUT S/S

ANODIZED ALUMINUM BRACKET

RUBBER MOUNT FEET

MATERIALS:

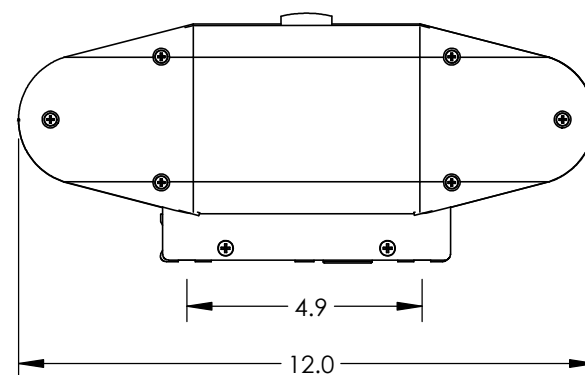
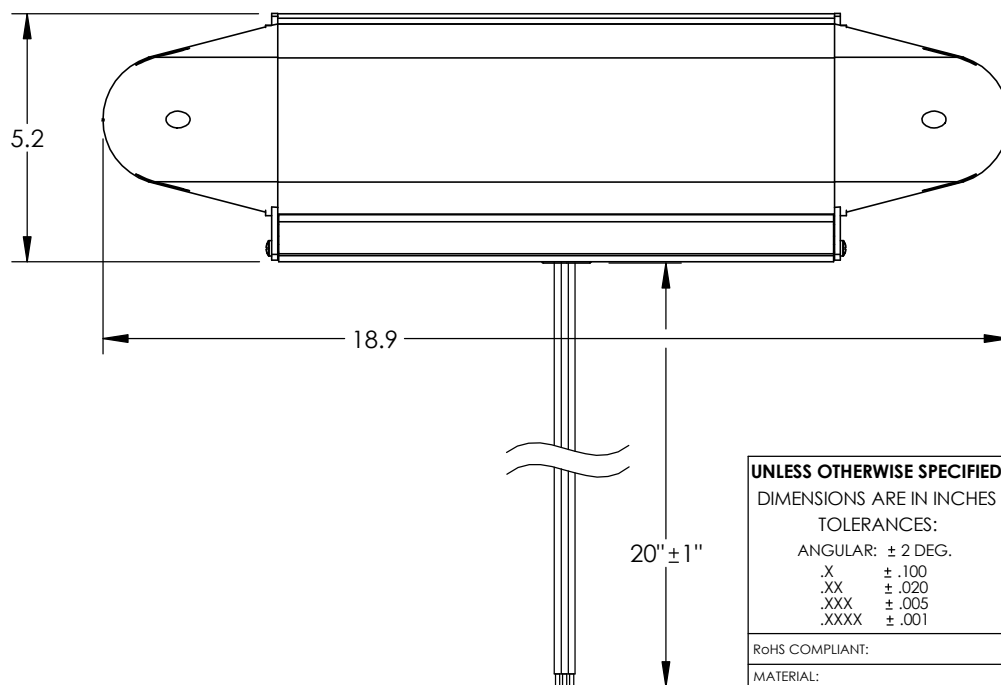
EXTERIOR DOME: POLYCARBONATE

INTERIOR DOME: POLYCARBONATE

INSTRUCTION SHEET:

1 PROVIDED

REV.	ECR	DESCRIPTION	DATE
-	17154	INITIAL DRAWING REQUEST	03/03/20

**UNLESS OTHERWISE SPECIFIED**

DIMENSIONS ARE IN INCHES

TOLERANCES:ANGULAR: ± 2 DEG..X $\pm .100$.XX $\pm .020$.XXX $\pm .005$.XXXX $\pm .001$

RoHS COMPLIANT:

MATERIAL:

N/A

FINISH:

N/A

DRAWN BY:

MB

DRAWING APPROVED BY ECR

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.

STAR HEADLIGHT & LANTERN CO., INC.

455 Rochester St. Avon NY 14414
Ph:(585) 226-9500 Fax: (585) 226-2029

MODEL: 6020LX-*

TITLE:

MODEL DRAWING

DWG. NO.

6020LX

REV

-

SCALE: 1:8

DO NOT SCALE FROM DRAWING

SHEET 1 OF 1