

REV.	ECR	DESCRIPTION	DATE
-	17154	INITIAL DRAWING REQUEST	03/03/20

SPECIFICATION:

VOLTAGE RANGE: 9-16 VDC

CURRENT DRAW: 1.0 A AVERAGE, 2.0 PEAK @ 12.8 VDC

OPERATING TEMPERATURE RANGE: -40°C TO 55°C

CONNECTIONS:

12' CIG. PLUG w/SWITCH

MOUNT:

(4) CERAMIC MAGNETS, 100LB PULL FORCE PER MAGNET



MATERIALS:

EXTERIOR DOME: POLYCARBONATE

INTERIOR DOME: POLYCARBONATE

INSTRUCTION SHEET

1 PROVIDED

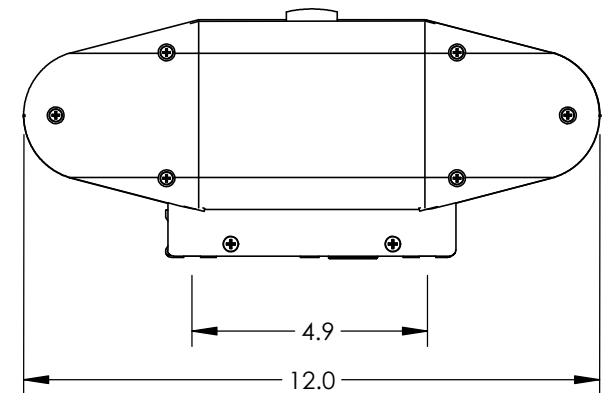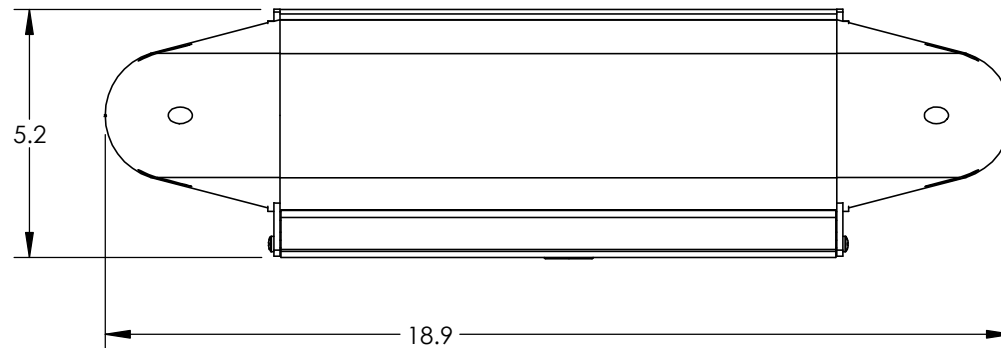

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 2 DEG. .X ± .100 .XX ± .020 .XXX ± .005 .XXXX ± .001 RoHS COMPLIANT: MATERIAL: N/A FINISH: N/A	DRAWN BY:	MB	STAR HEADLIGHT & LANTERN CO., INC. 455 Rochester St. Avon NY 14414 Ph:(585) 226-9500 Fax: (585) 226-2029			
	DRAWING APPROVED BY ECR					
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.		MODEL: 6020LXM-*			
			TITLE: MODEL DRAWING			
		DWG. NO.		6020LXM		REV -
		SCALE: 1:8		DO NOT SCALE FROM DRAWING		SHEET 1 OF 1